KI-B85ST80A-i100TSMPUR






- پنج سال گارانتی طلایی بدون قید و شرط کی دی تی
- شش سال ضمانت پایداری کیفیت تصویر


قابلیت‌های هوشمند

- عبور از خط
- فنس مجازی
- ورود به منطقه
- خروج از منطقه
- تشخیص چهره
- تشخیص پرسه زنی افراد
- تردد شمار هوشمند

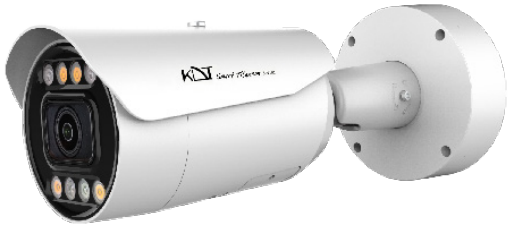

سایر برتری‌ها

- پشتیبانی از میکرو SD با ظرفیت 512GB
- بدنه ضد آب و گرد و غبار با درجه IP67 , IK10
- سرور انتقال تصویر در ایران
- پشتیبانی از H.264+ / H.265+
- پشتیبانی از ONVIF ورژن 2.6
- قابلیت دید در شب هوشمند
- قابلیت WDR, BLC, HLC, Defog و ROI تا ۸ ناحیه
- پشتیبانی از ضبط اضطراری ANR
- **قابلیت ثبت دقیق پلاک وسایل نقلیه در سرعت بالا و شرایط دشوار (شب، باران، مه)**
- **امکان سفارش با نرم‌افزار امن و محدود شده جهت استفاده در مراکز با حساسیت بالا به همراه گواهینامه.**

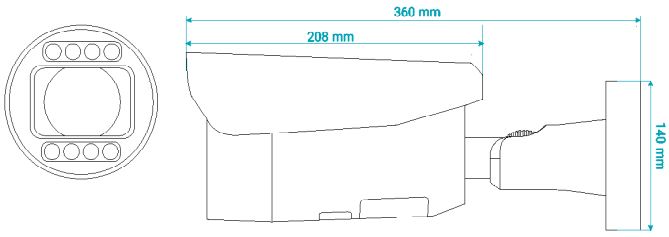

Camera	
Image Sensor	8MP Progressive scan Cmos Sensor (1/1.8")
CPU	Dual-Core ARM Cortex (AI ISP)
Resolution	3840*2160 (8MP)
illuminator range	100~110 m Smart IR SMD Technology 50 m Warm Light Technology Smart Light Technology
D/N Filter	IR cut filter with auto switch
Min illumination	Color: 0.001 Lux(AGC on) - B/W: 0.0 Lux(IR on) (Warm Light On)
Night Vision	Dual Light Technology
Lens	
Lens Type	Motorized Auto Focus
Lens Mount	Integrated
Focal Length	8~32 mm @F1.7
Iris Type	DC-Iris
Angle of View	H-FOV: 42.8°~15.4°, V-FOV: 24.8°~8.8°, D-FOV: 48.4°~17.7°
DORI Detection	
DORI	Detect:196~568m Observe: 79~229m Recognize: 39~114m Identify: 20~57m
Picture Adjust	
Picture Function	130dB WDR/DWDR, LPC, 2D/3D DNR, BLC, HLC, ROI, Defog, Rotate
Shutter Speed	Manual (1/3 ~ 1/100.000), Auto
Image Parameter Control	Off, On, Timing (Adjust 0 ~ 255)
D/N Control	Timing, Auto, Color on, Color off
S/N	> 56dB
Image Parameter	Saturation, Brightness, Contrast, Sharpness, Hue
Video / Audio	
Video Compression	H.264+(Ultra H.264), H.265+ (Ultra H.265), MJPEG
Audio Compression	G.711A, G.711U
Frame Rate(60Hz)	30fps@ 8MP(3840*2160),30fps@ 6MP, 30fps@ 4MP , 30fps@2MP
Transmission Stream	Triple Stream (Video Bit Rate:11 Kbps~16 Mbps)
Network	
Protocols	TCP/IP(V4, V6), ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, SNMP (V1, V2, V3), UDP, NAT, Multicast, RTMP
Compatibility	Onvif Ver2.6, Profile S, G, T, CGI, SDK, API
Streaming Method	Unicast, Multicast

Web Viewer	IE, Edge, Firefox, Chrome
Smart Device	IOS, Android Phone & Tablet
Function	
Recording	FTP, NAS, NVR, CMS, VMS, SD Card, ANR
Record Type	Manual, Motion Detection, Smart Detection, Schedule
Alarm Triggers	All Intelligent Function
Event Action	Email, PTZ, Snapshot, Recording, Buzzer, Pop up, Show Message
Event	Smart Motion Detection, Video Shelter
Intelligent Function	7 Smart Function Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Face Detection, Loitering Detection, Smart People Counting
Active Deterrence	
Red/Blue Light Warning	Flash: 5 s–30 s; frequency: high/medium/low
Sound Warning	Audio 1/2/3; Volume: high/medium/low; duration: 5 s–30 s; 106 dB
Interface	
Network	1 RJ45 (10M / 100M) Ethernet Port
External Audio	Audio Out, Audio in
Internal Audio	Internal Mic ,Internal Speaker
Alarm	Alarm In, Alarm Out
RS485	N/A
Power	PoE LAN, DC In
Reset Button	Yes (Optional)
Memory Slot	Yes - Micro SD/SDHC/SDXC Slot (512 Gb Max) (ANR Support)
General	
Protection Rating	IP67, IK10, 6KV Surge Protection
Power Supply	DC12V ± 25%
POE Supply	IEEE802.3at - Max 16.8 Watt
Web Language	English, Persian
Dimension	142*360.3 mm
Weight	2850 g
Operation Humidity	Humidity 95% or less (non-condensing)
Operation Temp	-40°C ~ +60°C
Guarantee	
Product Guarantee	5 Years Gold Guarantee
MTBF	100K hrs min. MIL-HDBK-217F (25°)
Certificates	EN, CN, FCC, CFR

بدون اطلاع قبلی حق تغییر در شکل ظاهری و ارتقا مشخصات فنی محفوظ می باشد.